



Air Conditioning & Heating

## PRODUCT SPECIFICATIONS



# GSAS SERIES

## WHOLE-HOUSE, HIGH-EFFICIENCY ELECTRONIC AIR CLEANER

The Goodman® high-efficiency electronic air cleaner is designed to remove air contaminants down to 0.01 micron. The GSAS series helps protect and prolong the operating efficiency of the heating and cooling equipment.

### Standard Features

- Pre-filters constructed of aluminum mesh to prevent lint and large particles from entering the collecting cells
- Collecting cells constructed of heavy-gauge aluminum
- Activated carbon filters help remove unpleasant odors
- Air-proving switch cycles air cleaner on/off with system fan
- ON/OFF switch light indicates power to air cleaner
- Performance indicator light indicates high voltage transmitted to collecting cells
- Equipped with a variable resistor (potentiometer) to adjust high-voltage output
- Removable power box contains the ON/OFF switch, performance indicator light, safety interlock switch, high-voltage power board, and air-proving switch

### Cabinet Features

- Cell guides ensure proper placement of collecting cells in cabinet
- Heavy-gauge galvanized steel cabinet allows for vertical or horizontal installation
- Durable powder-coat paint finish helps cabinet resist corrosion



Full warranty details available at [www.goodmanmfg.com](http://www.goodmanmfg.com).




# PRODUCT SPECIFICATIONS

## SPECIFICATIONS

Model	GSAS-10	GSAS-11	GSAS-12	GSAS-18
House Size	<2,400 ft <sup>2</sup> <222.96 m <sup>2</sup>	<3,000 ft <sup>2</sup> <278.70 m <sup>2</sup>	<3,000 ft <sup>2</sup> <278.70 m <sup>2</sup>	>3,000 ft <sup>2</sup> >278.70 m <sup>2</sup>
Airflow	up to 1,200 CFM up to 2,039 m <sup>3</sup> /hr	up to 1,400 CFM up to 2,379 m <sup>3</sup> /hr	up to 1,400 CFM up to 2,379 m <sup>3</sup> /hr	up to 2,000 CFM up to 3,398 m <sup>3</sup> /hr
Duct Size	16" x 20" 40.5 x 51 cm	16" x 25" 40.5 x 63.5 cm	20" x 20" 51 x 51 cm	20" x 25" 51 x 63.5 cm
Weight	28 lbs / 12.9 kg	30 lbs / 13.5 kg	33 lbs / 15.3 kg	38 lbs / 17.5 kg
Power	120-volt 60 hz / 30 watts	120-volt 60 hz / 30 watts	120-volt 60 hz / 30 watts	120-volt 60 hz / 30 watts

## DIMENSIONS

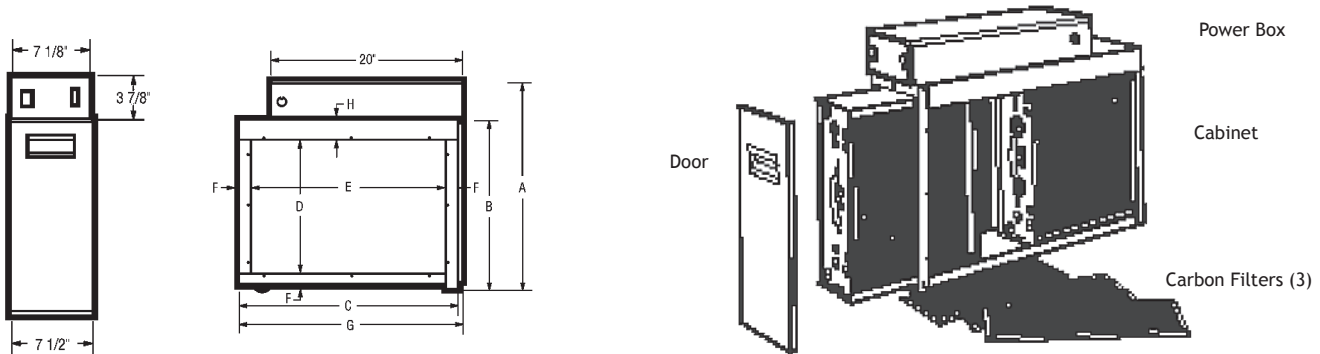

Model	Dimensions — inches / cm							
	A	B	C	D	E	F	G	H
GSAS-10ASC	21 / 53.0	17 / 43.5	23 <sup>3</sup> / <sub>4</sub> / 59.0	13 <sup>5</sup> / <sub>8</sub> / 33.5	20 <sup>3</sup> / <sub>4</sub> / 53.0	1 <sup>1</sup> / <sub>4</sub> / 3.0	23 <sup>3</sup> / <sub>4</sub> / 60.5	2 <sup>5</sup> / <sub>8</sub> / 6.0
GSAS-11ASC	21 / 53.0	17 / 43.5	26 / 66.0	13 <sup>5</sup> / <sub>8</sub> / 34.5	24 / 61.0	1 / 2.5	26 <sup>1</sup> / <sub>2</sub> / 67.5	2 <sup>1</sup> / <sub>8</sub> / 5.5
GSAS-12ASC	25 <sup>5</sup> / <sub>8</sub> / 66.0	22 / 56.0	21 <sup>1</sup> / <sub>4</sub> / 54.0	18 / 46.0	18 <sup>3</sup> / <sub>4</sub> / 47.5	1 <sup>1</sup> / <sub>4</sub> / 3.0	21 <sup>1</sup> / <sub>4</sub> / 55.0	2 <sup>5</sup> / <sub>8</sub> / 6.0
GSAS-18ASC	25 <sup>5</sup> / <sub>8</sub> / 66.0	22 / 56.0	26 / 66.0	18 / 46.0	23 <sup>1</sup> / <sub>2</sub> / 59.5	1 <sup>1</sup> / <sub>4</sub> / 3.0	26 <sup>1</sup> / <sub>2</sub> / 67.5	2 <sup>5</sup> / <sub>8</sub> / 6.0

## ACCESSORIES

Model	Replacement Filter
GSAS-10 GSAS-11	Part #1156-3
GSAS-12 GSAS-18	Part #1856-3

For the most powerful air cleaning system available, add an Amana® brand True HEPA Air Cleaner to the Amana® brand Electronic Air Cleaner.

DAX Detergent Size	Part #
32 oz (1L) Spray Bottle	#9900
1.1 gal (4L) Jug	#9901

To keep your lifetime filter system at its best, wash collecting cells and pre-filters with DAX Electronic Air Cleaner Detergent. Activated carbon filters should be replaced every 3 to 6 months. Additional activated carbon filters are available in three-packs.

**For more information, call the air cleaner help line toll-free 1-800-267-8305**

